Unlimited Sports Solutions

# Install Instructions for a Side Line Net System

# End Poles

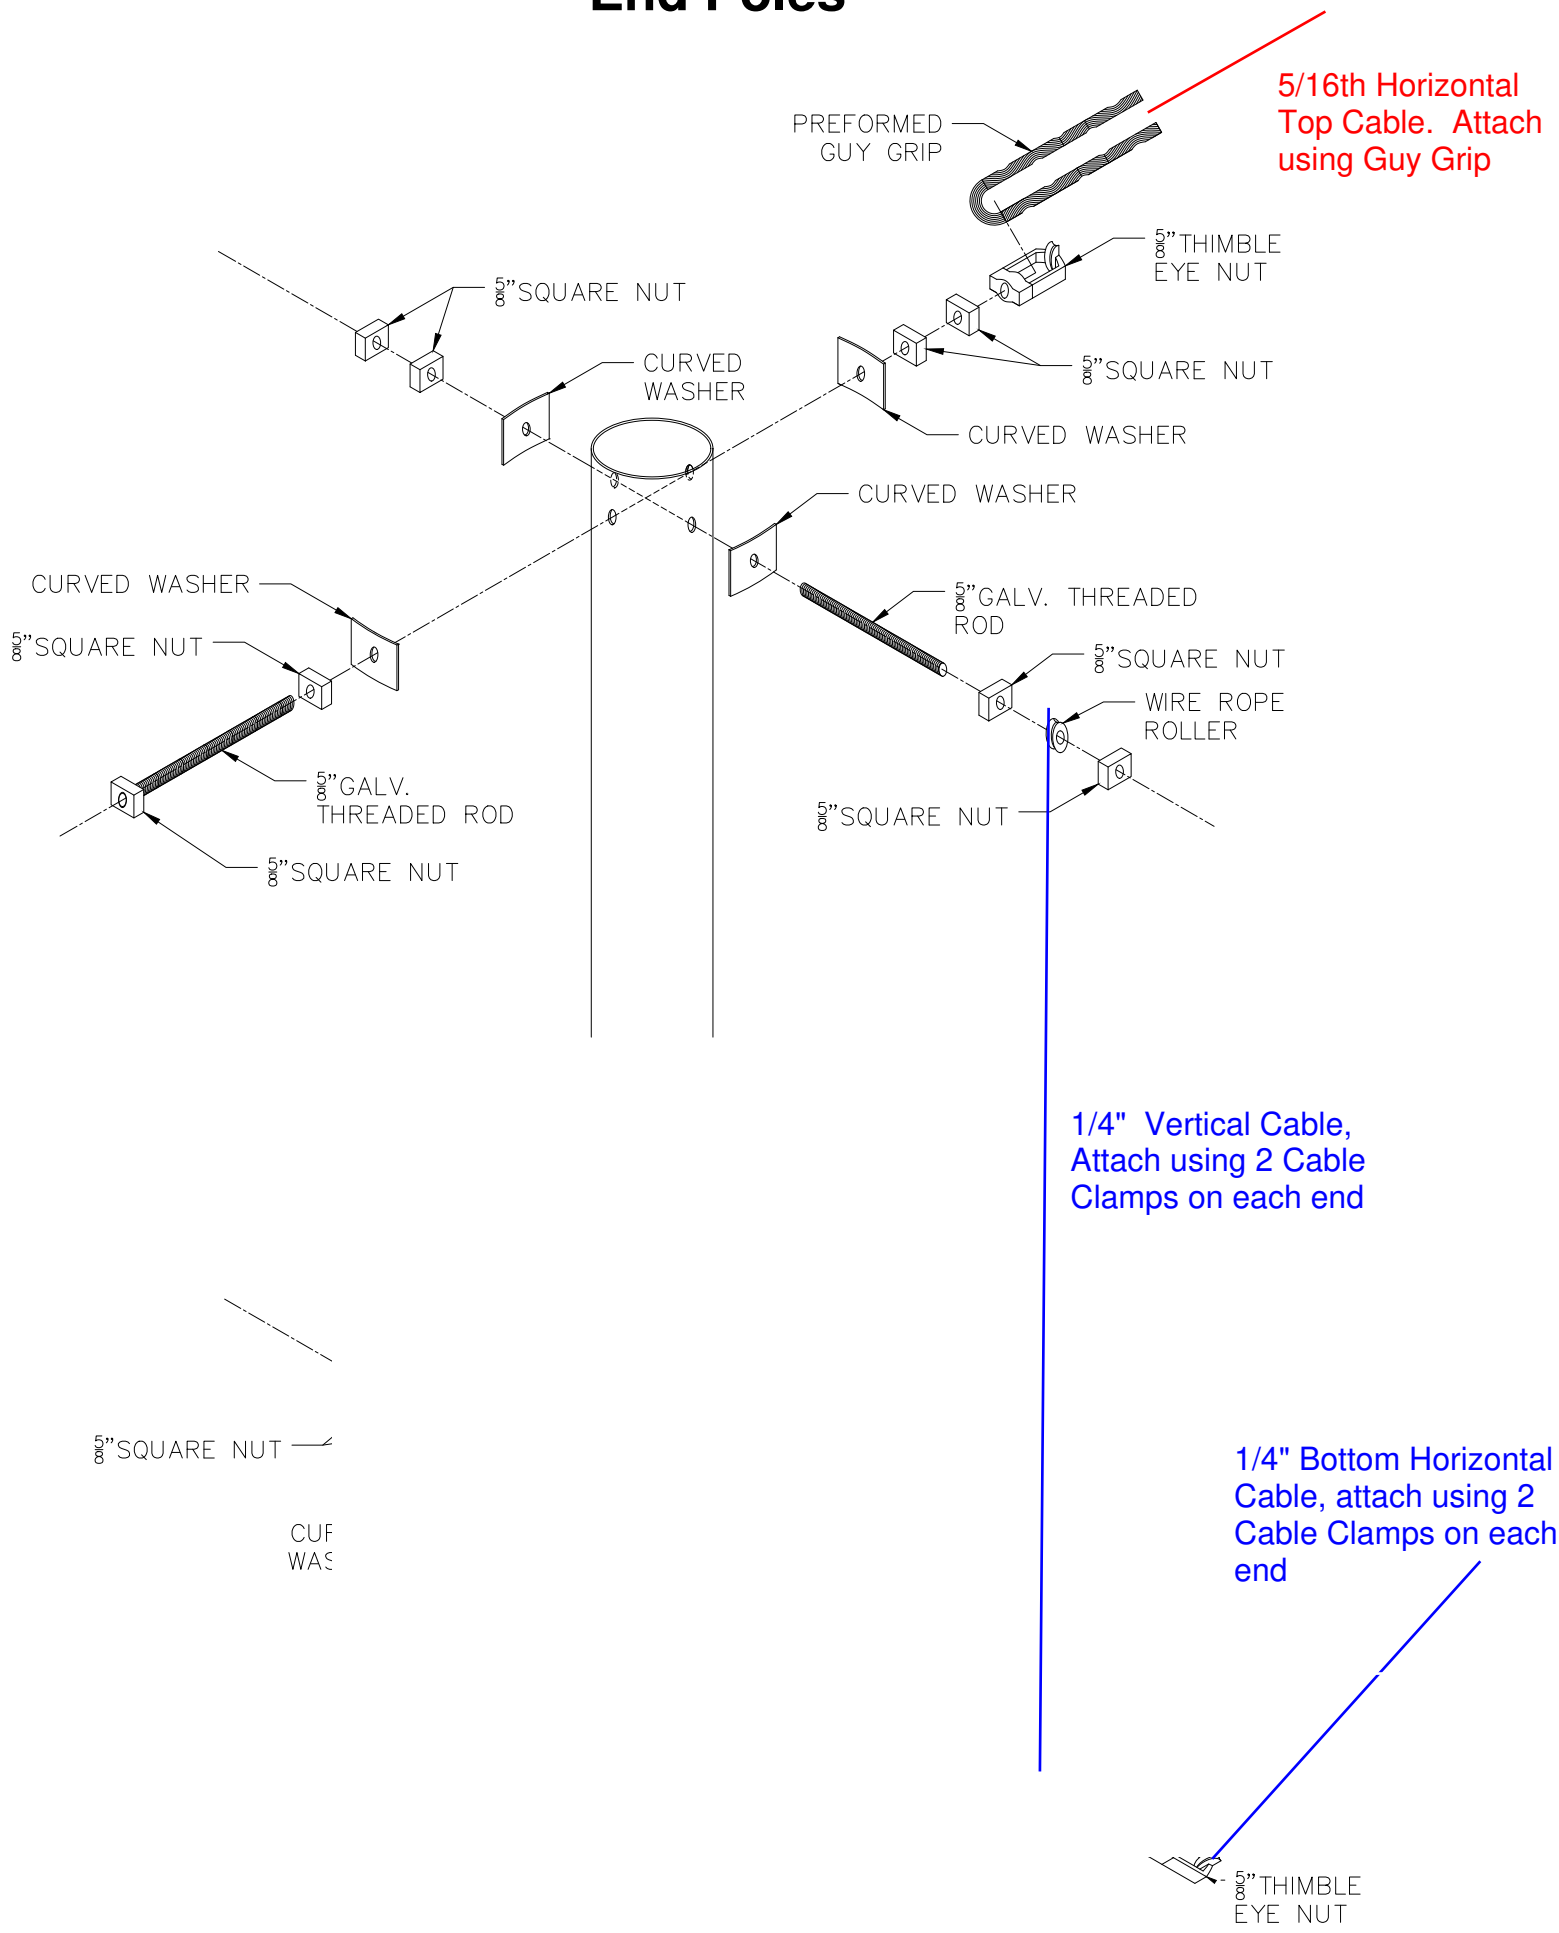
5/16th Horizontal Top Cable. Attach using Guy Grip
PREFORMED GUY GRIP
5/8"THIMBLE EYE NUT
5/8"SQUARE NUT
CURVED WASHER
5/8"SQUARE NUT
CURVED WASHER
CURVED WASHER
CURVED WASHER
5/8"GALV. THREADED ROD
5/8"SQUARE NUT
5/8"SQUARE NUT
WIRE ROPE ROLLER
5/8"GALV. THREADED ROD
5/8"SQUARE NUT
5/8"SQUARE NUT
1/4" Vertical Cable, Attach using 2 Cable Clamps on each end
1/4" Bottom Horizontal Cable, attach using 2 Cable Clamps on each end
5/8"THIMBLE EYE NUT

# Mid Poles

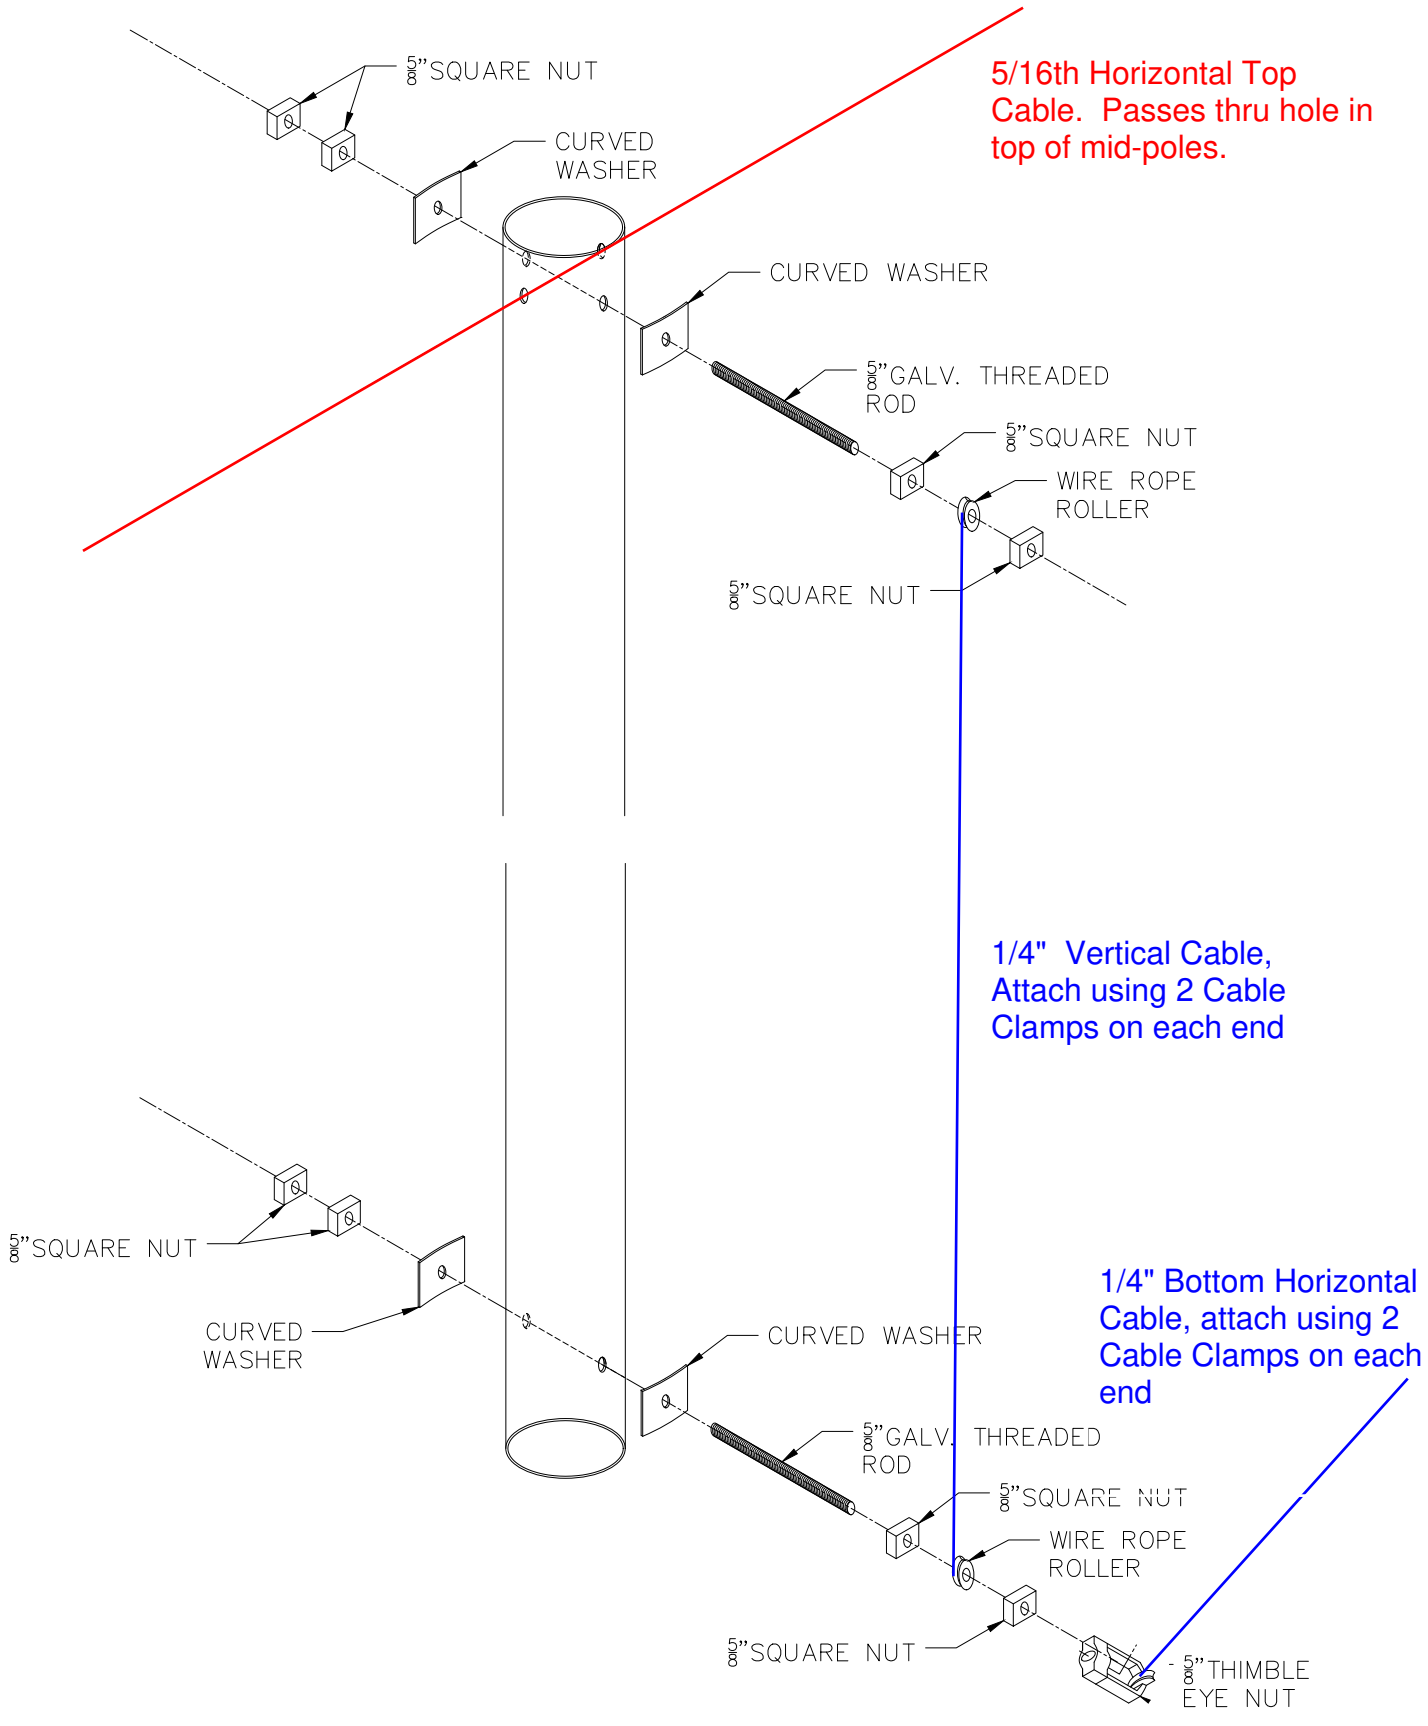
5/16th Horizontal Top Cable. Passes thru hole in top of mid-poles.
5/8"SQUARE NUT
CURVED WASHER
CURVED WASHER
5/8"GALV. THREADED ROD
5/8"SQUARE NUT
WIRE ROPE ROLLER
5/8"SQUARE NUT
1/4" Vertical Cable, Attach using 2 Cable Clamps on each end
5/8"SQUARE NUT
CURVED WASHER
CURVED WASHER
1/4" Bottom Horizontal Cable, attach using 2 Cable Clamps on each end
5/8"GALV. THREADED ROD
5/8"SQUARE NUT
WIRE ROPE ROLLER
5/8"SQUARE NUT
5/8"THIMBLE EYE NUT

# Hanging Net From 5/16" Top Cable

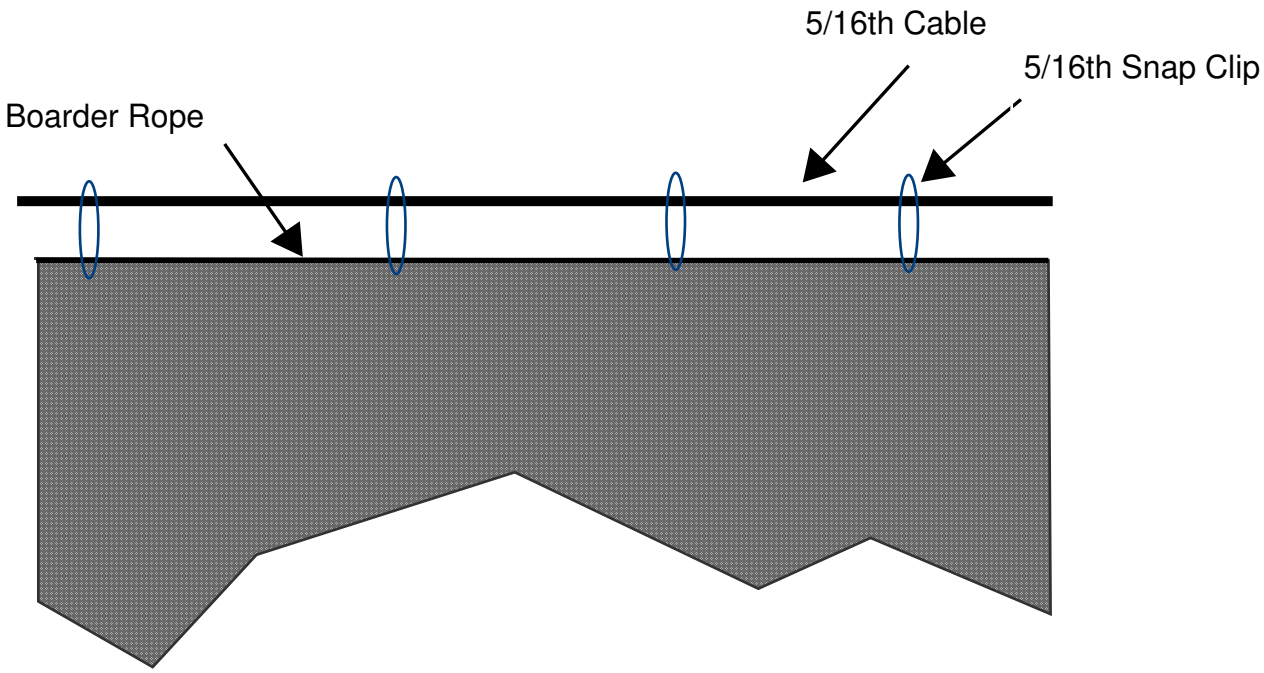


Notes:
1. Use 5/16" Galvanized Snap Clips 2' On Center and at Ends
2. Make sure Snap Clip is only around boarder rope and not net material

# Attaching Net To Vertical 1/4" Cables

Notes:
1. Use 9 GA. Galvanized Steel Hog Rings Every 6"
2. Make sure Hog Ring is only around boarder rope and Cable and not net material

# Attaching Net To Bottom 1/4" Cable

**Notes:**
1. Use 9 GA. Galvanized Steel Hog Rings Every 6"
2. Make sure Hog Ring is only around boarder rope and Cable and not net material
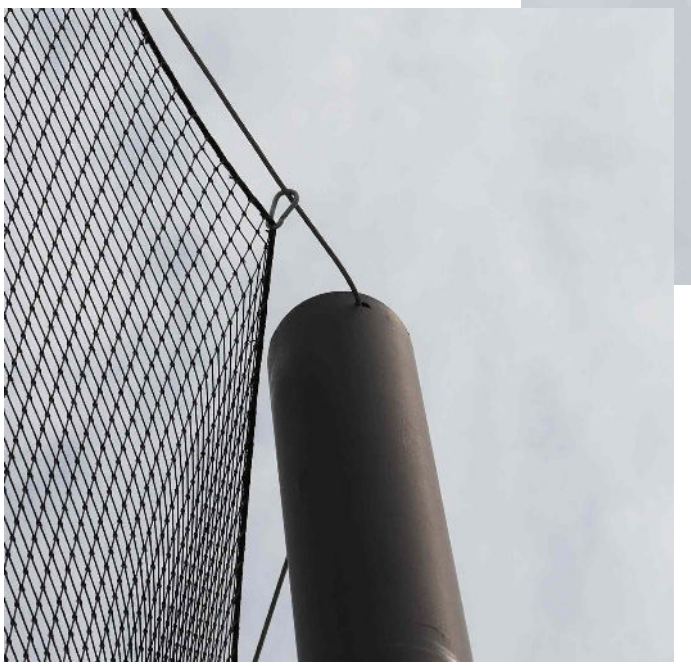
# Misc. Pictures of Connection Points